


▲ WARNING

Improper loading can cause a crash and you may be seriously hurt or killed. See "Load Limits and Guidelines" in your Owner's Manual for complete instructions.

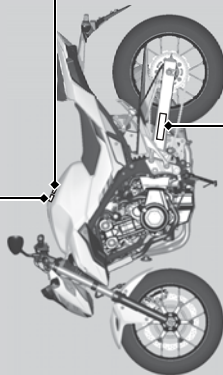

For your protection, always wear your helmet while riding. Read the owner's manual carefully.

TIRE INFORMATION

Cold tire pressures :
 (Up to maximum weight capacity)
 Front 250kPa/2.50kgf/cm²/36psi
 Rear 290kPa/2.90kgf/cm²/42psi
 (Up to 90kg(200lbs) load)
 Front 250kPa/2.50kgf/cm²/36psi
 Rear 290kPa/2.90kgf/cm²/42psi
 Maximum weight capacity:168kg(370lbs)
 Tire size : Front 120/70ZR17M/C(58W)
 Rear 160/60ZR17M/C(69W)

Tire brand DUNLOP METZELER
 Front D222F ROADTEC Z8 INTERACT E
 Rear D222 P ROADTEC Z8 INTERACT M
 Min. recommend tire center tread depth,
 Front 1.5 mm (0.06 in.) Rear 2.0 mm (0.08 in.)
 Read owner's manual.

This motorcycle is equipped with tubeless tires.