


## Tire Puncture ► Removing Wheels

8. Loosen the left axle pinch bolts.
9. On the left side, withdraw the front axle shaft, and remove the side collars and wheel.

CBR1000RR/RA

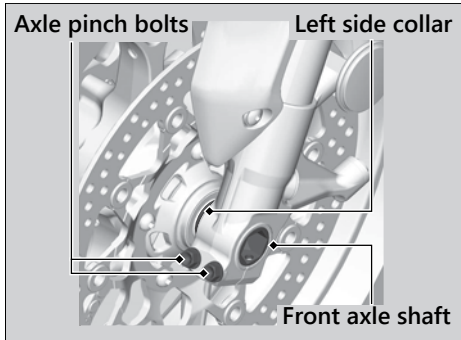

CBR1000S1

