


# Suspension


5. Pour the recommended fork oil into the outer tube (1).

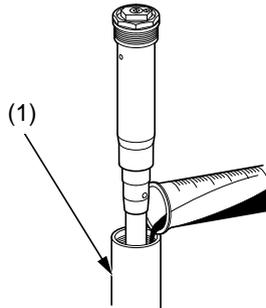

(1) outer tube


## Fork Oil Capacity:

### Standard 25.12 lbf/in (4.4 N/mm) Fork Spring

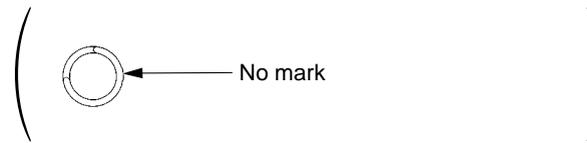


Standard oil capacity	12.3 US oz (365 cm <sup>3</sup> )	
Maximum oil capacity	12.9 US oz (380 cm <sup>3</sup> )	Slightly stiffer as it nears full compression.
Minimum oil capacity	10.0 US oz (296 cm <sup>3</sup> )	Slightly softer as it nears full compression.

### Optional Softer 23.98 lbf/in (4.2 N/mm) Fork Spring

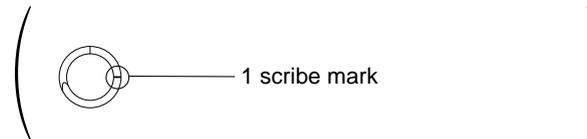

Standard oil capacity	12.5 US oz (370 cm <sup>3</sup> )	
Maximum oil capacity	13.0 US oz (385 cm <sup>3</sup> )	Slightly stiffer as it nears full compression.
Minimum oil capacity	10.2 US oz (301 cm <sup>3</sup> )	Slightly softer as it nears full compression.

### Optional Stiffer 26.20 lbf/in (4.59 N/mm) Fork Spring

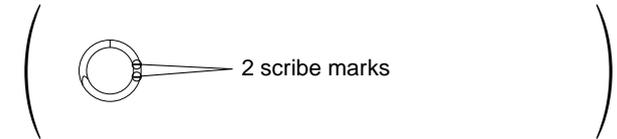

Standard oil capacity	12.4 US oz (368 cm <sup>3</sup> )	
Maximum oil capacity	12.9 US oz (382 cm <sup>3</sup> )	Slightly stiffer as it nears full compression.
Minimum oil capacity	10.1 US oz (299 cm <sup>3</sup> )	Slightly softer as it nears full compression.

Be sure the oil capacity is the same in both fork legs.