

## Removal

1. Remove the centre lower cowl. ► P. 50
2. Remove the clips. ► P. 51
3. Remove the bolts.
4. Release the tabs A and tabs B.  
► Carefully release the tabs.
5. Remove the right cowl by releasing the grommet from the prong.
6. Disconnect the connectors.


## Installation

Install the parts in the reverse order of removal.

## Harness Band Clip

### Removal

Pull the harness band clip while pressing both sides of the anchor.

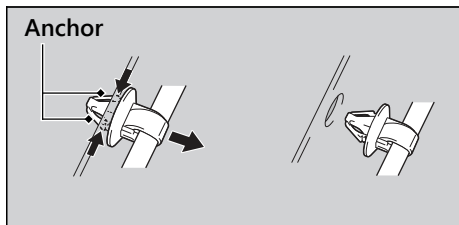

### Installation

Install the harness band clip until it seats properly.